
## **CLIMBING WALL**



**FFH: 0.75**m **MIN. AREA:** 18.9m<sup>2</sup>



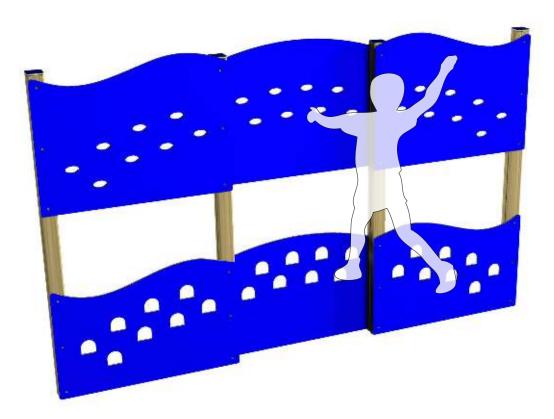


All our timbers are pressure treated with a chrome-free and arsenic-free preservative which protects against decay and insect attack for 20 years.




Fastenings are tamper-proof or capped with secure custommade plastic tamper proof covers. All footholds have a slip-resistant surface.



High specification, selfcoloured, co-extruded polyethylene panels. This material is extremely durable, will not fade in sunshine, it is unaffected by moisture, will not delaminate.



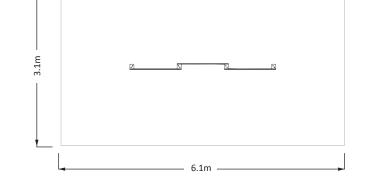

◄ 0.12m ►